


- 1) MATERIAL: 6 mm DIA STAINLESS STEEL ROD.
- 2) TIP TO FIT IN 12 mm DIA HOLE & TO BE FINISHED TO A FINE POINT FOR RAKING INSIDE INSPECTION HOLES.
- 3) NOTCH GRADUATIONS:

- EACH NOTCH ACTUALLY REPRESENTS 10 mm (PROBE DESIGNED TO BE USED AT APPROX. 45 DEG)

- EVERY FIFTH NOTCH TO BE STAMPED ACCORDINGLY IN 2.5 mm HIGH LETTERING i.e. 50, 100, 150 etc

- NOTCHES TO BE MARKED FOR THE FULL LENGTH OF THE PROBE

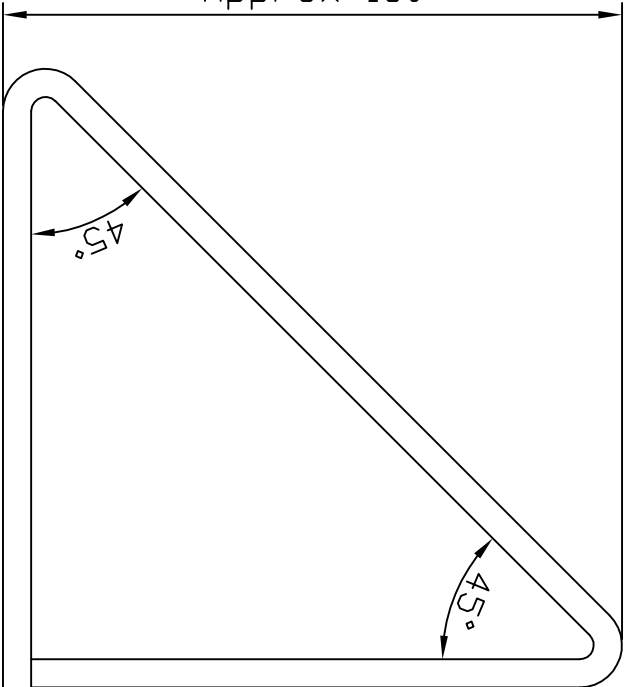


TYPE 1 MIN 360mm LONG – TYPE 2 MIN 705mm LONG

REFER DETAIL 'B'


SIDE VIEW

REFER DETAIL 'A'

END VIEW

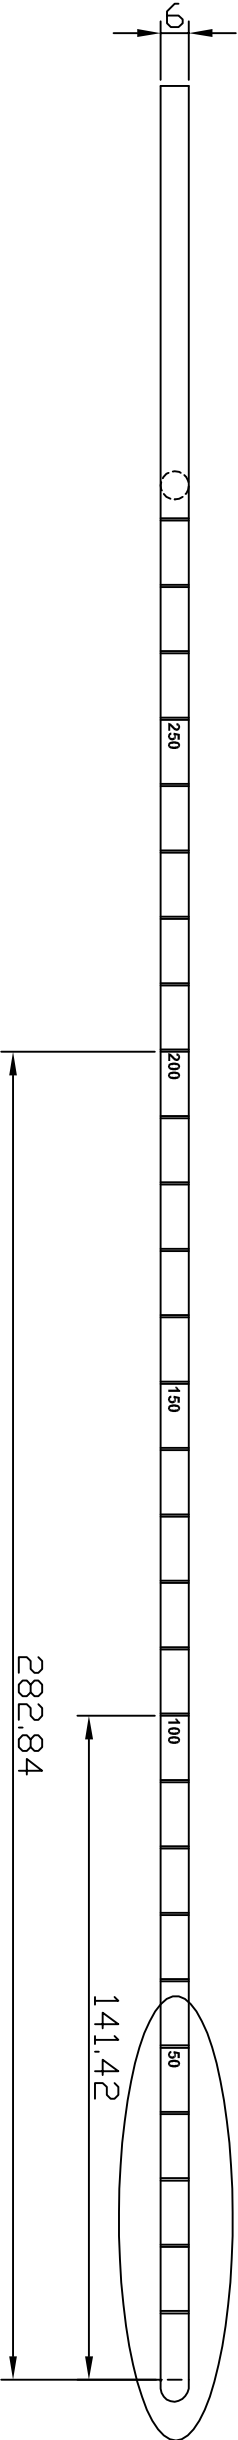

REAR VIEW

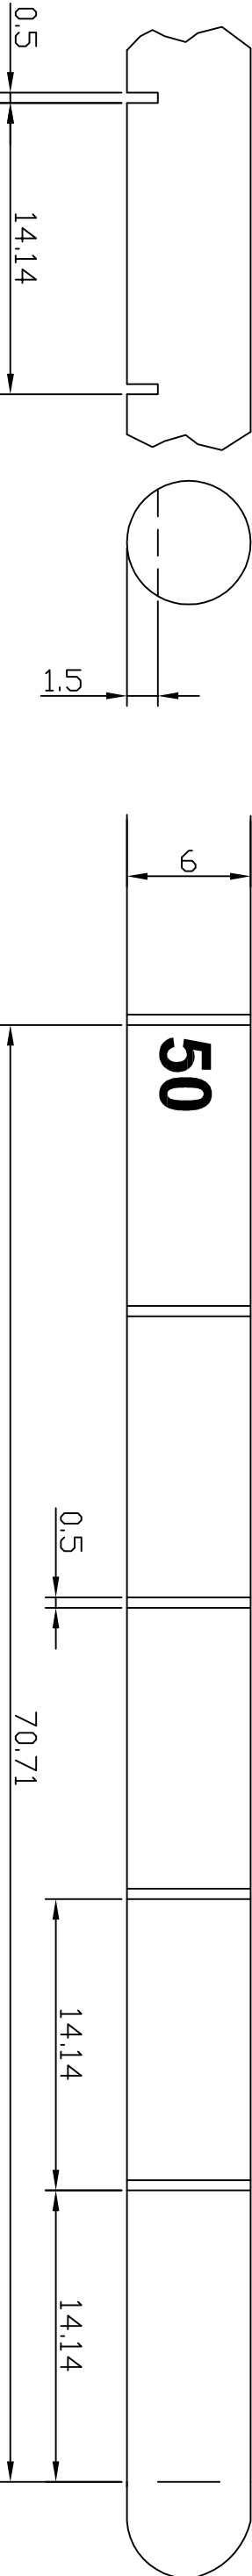

DETAIL 'B' - NOTCH DEPTH

SCALE 5:1

DETAIL 'A'

SCALE 5:1

AMENDMENTS	
A	ORIGINAL ISSUE
B	DR'N GSF CH'D GSF DATE 21-08-01 JR No --
SCALE REVISED, HANDLE CHANGED TO PROVIDE 45 DEG DRILLING TEMPLATE	
DSM	GSF

POLE INSPECTORS POLE PROBE
TYPE 1 & 2
FABRICATION DETAIL

ORIGINAL SCALE
APPROVED
G. Ford

DD NOT SCALE
DIMENSIONS IN MILLIMETRES

AUTHORISED
W. Isley
MANAGER ASSET SERVICES
21/08/2001

A3
060592
B