


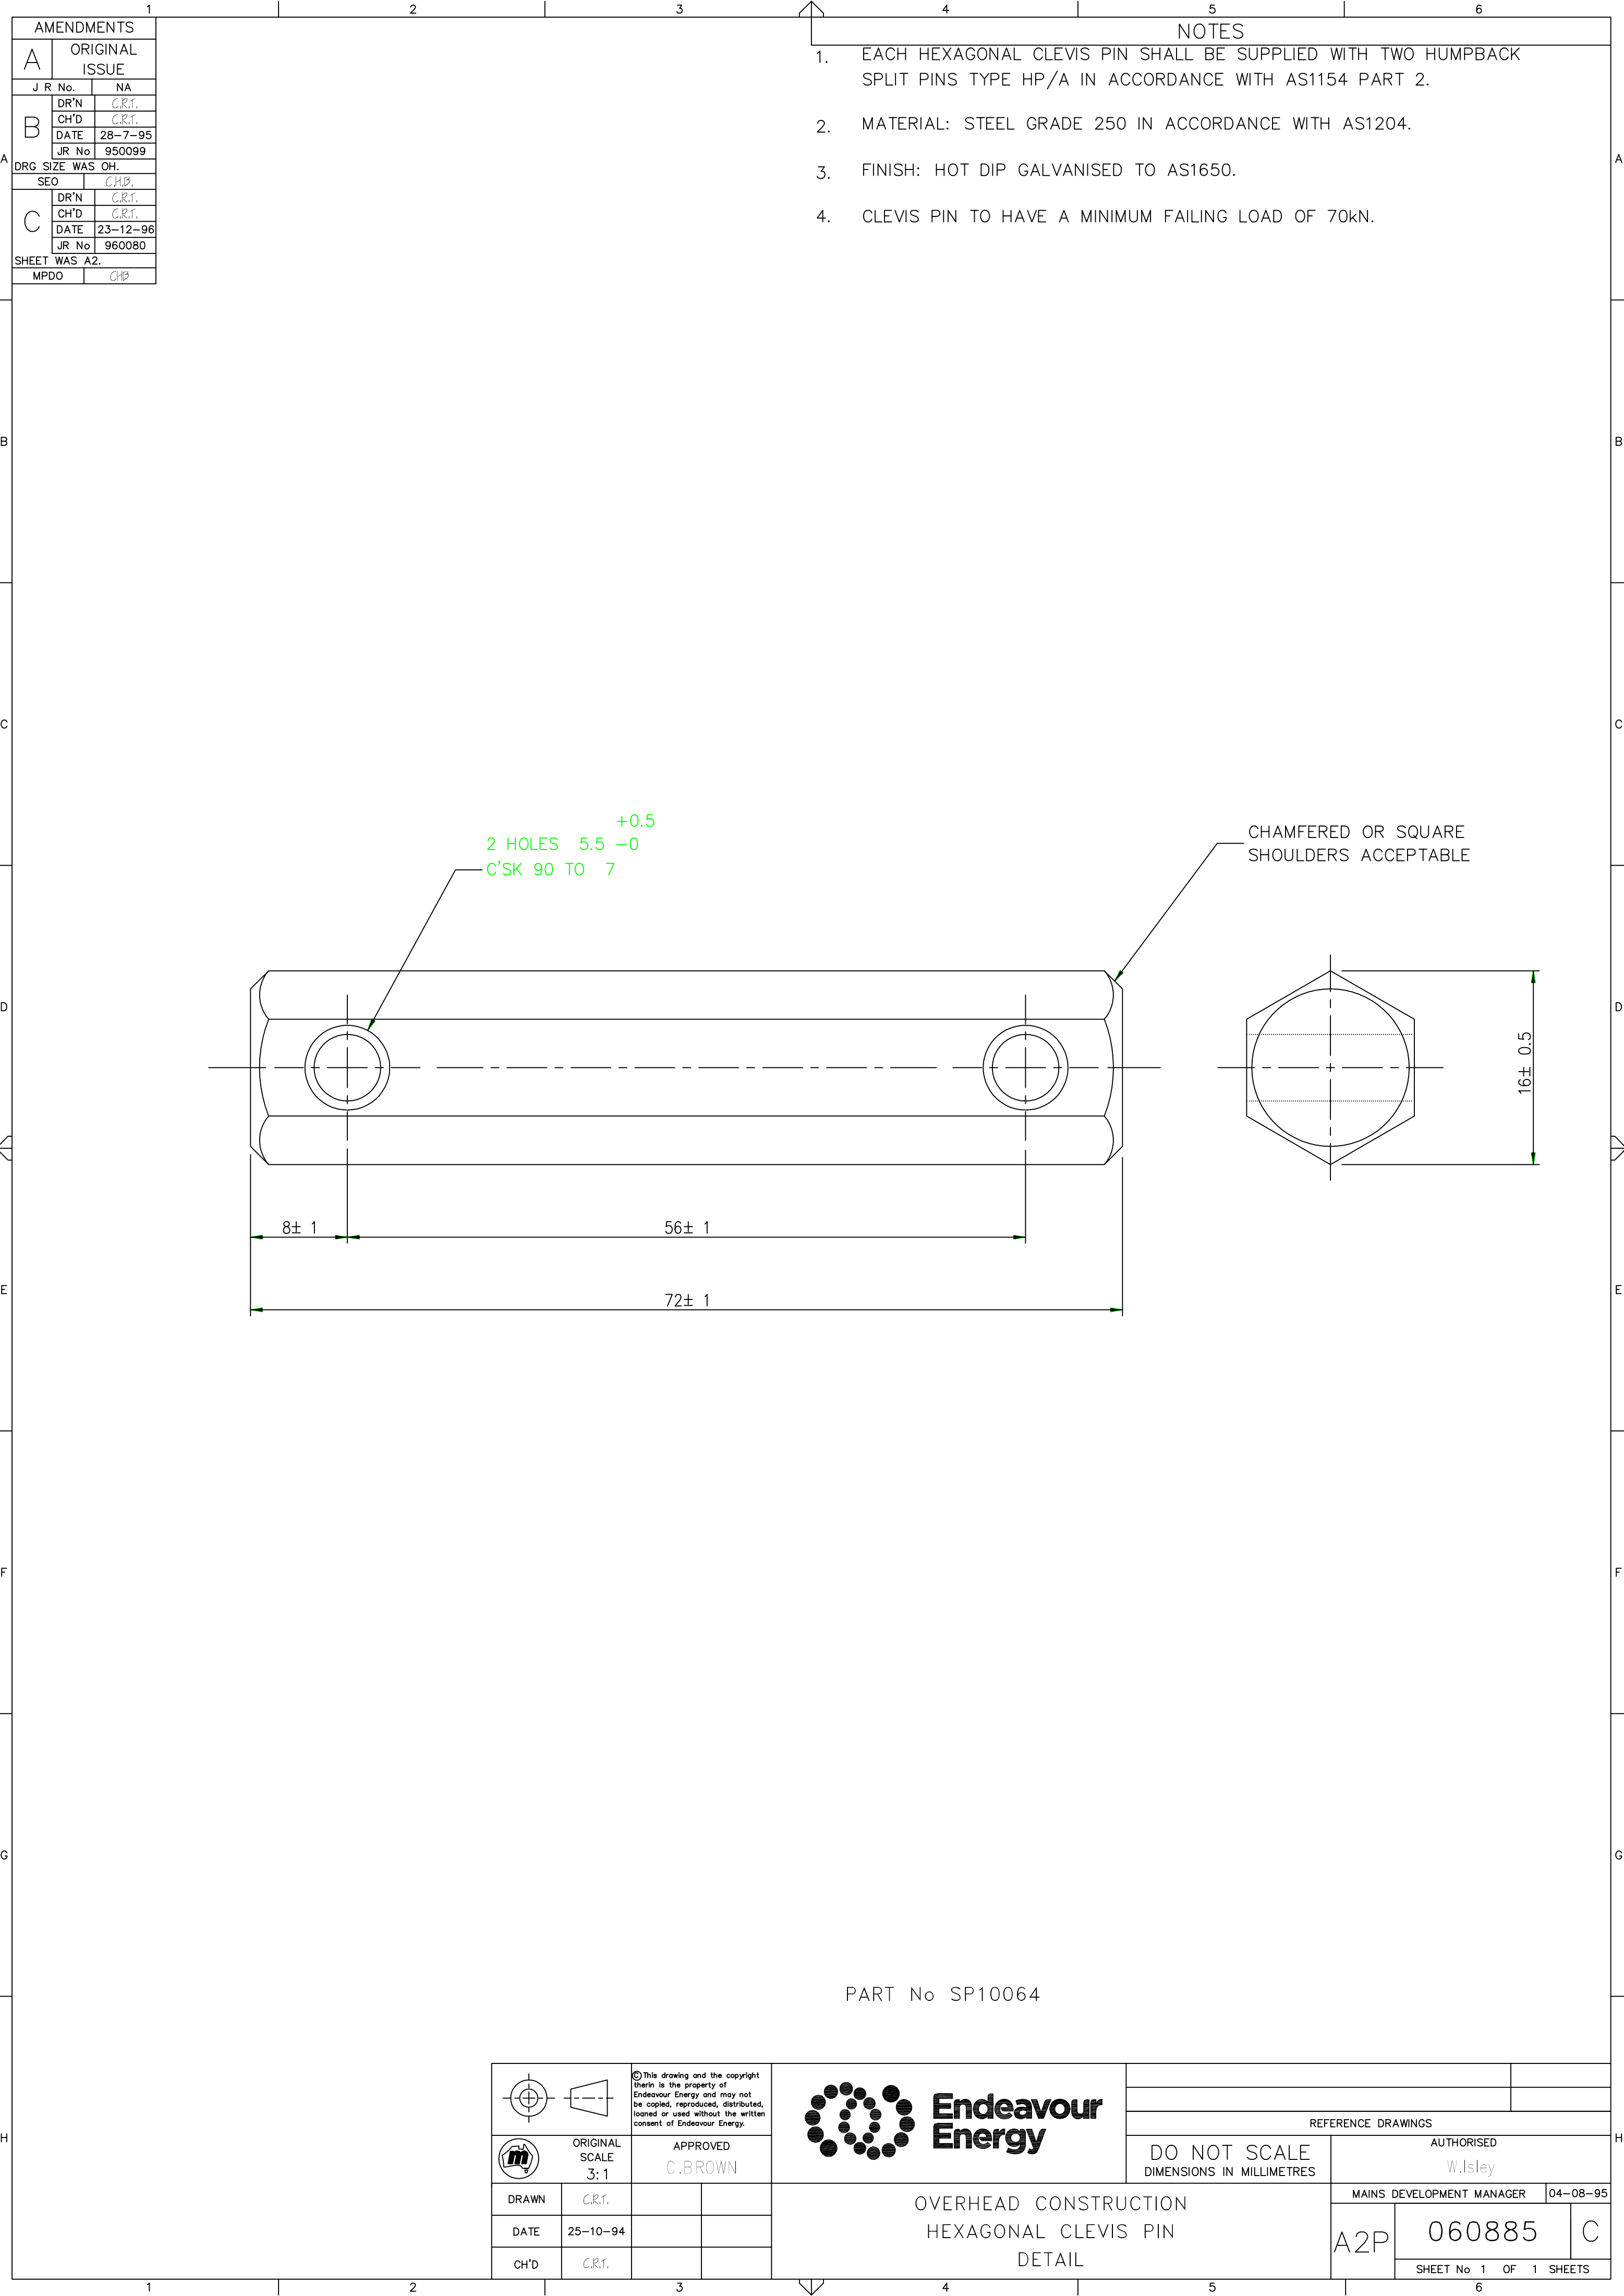

1			
AMENDMENTS			
A	ORIGINAL ISSUE		
J R No.		NA	
B	DR'N	C.R.T.	
	CH'D	C.R.T.	
	DATE	28-7-95	
	JR No	950099	
A	DRG SIZE WAS OH.		
SEO		CHB.	
C	DR'N	C.R.T.	
	CH'D	C.R.T.	
	DATE	23-12-96	
	JR No	960080	
SHEET WAS A2.			
MPDO		CHB	

- NOTES
1.

EACH HEXAGONAL CLEVIS PIN SHALL BE SUPPLIED WITH TWO HUMPBACK SPLIT PINS TYPE HP/A IN ACCORDANCE WITH AS1154 PART 2.
2.

MATERIAL: STEEL GRADE 250 IN ACCORDANCE WITH AS1204.
3.

FINISH: HOT DIP GALVANISED TO AS1650.
4.

CLEVIS PIN TO HAVE A MINIMUM FAILING LOAD OF 70kN.

© This drawing and the copyright therein is the property of Endeavour Energy and may not be copied, reproduced, distributed, loaned or used without the written consent of Endeavour Energy.

Endeavour Energy

DRAWN

DATE

CH'D

C.R.T.

25-10-94

C.R.T.

ORIGINAL SCALE

3: 1

APPROVED

C.BROWN

DO NOT SCALE

DIMENSIONS IN MILLIMETRES

REFERENCE DRAWINGS

AUTHORISED

W.Isley

OVERHEAD CONSTRUCTION

HEXAGONAL CLEVIS PIN

DETAIL

A2P

060885

C

SHEET No 1 OF 1 SHEETS

04-08-95