

HH

8. LOWEST POLE STEP PERMITS 5m LADDER ACCESS.



LENGTH OF POLE: REFER TABLE 1

POLE STEP FERRULES AT 450mm CENTRES:
REFER TABLE 1 FOR QUANTITY


POLE STEP FACE

LENGTH OF POLE	QTY OF POLE STEP FERRULES	DIMENSION 'E'
15 500	18	1900
17 000	21	2100
18 500	25	2200
20 000	28	2300
21 500	31	2500
23 000	34	2600

SYMBOL	DESCRIPTION	QTY	DRG
	HOLE FORMER 22	AS REQ'D	050871
	EARTHING FERRULE M12 X 1.75	AS REQ'D	050871
	POLE STEP FERRULE M16 X 2.0: COMPLETE WITH POLE STEP BOLT	REFER TABLE ABOVE	050871 050879
	IDENTIFICATION PLATE	1	053999

DIMENSION	TOLERANCE
0 TO 500mm	± 2mm
501 TO 10 000mm	± 10mm
POLE LENGTH	± 50mm

		loaned or used without the written consent of Endeavour Energy.	
		ORIGINAL SCALE NONE	APPROVED C.Brown
DRAWN	C.R.T.		
DATE	24-5-96		
CH'D	C.R.T.		

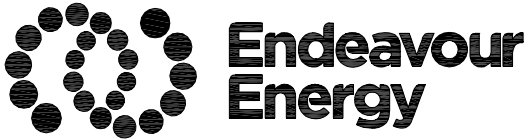

OVERHEAD TRANSMISSION BASIC CONCRETE POLE ARRANGEMENT

REFERENCE DRAWINGS			
DO NOT SCALE DIMENSIONS IN MILLIMETRES		AUTHORISED <i>W. Isley</i>	
SECTION POLE		MGR NETWORK MAINS ASSETS	
		17-10-96	
		A2P	
		050870	
		E	
		SHEET No 1 OF 1 SHEETS	